Copy of Plat transmitted to Kotzebue Recording District and recorded on July 19, 1994 as Plat # 94-5.

Officially Filed DUPLICATE **ORIGINAL**

DATE _ — — —

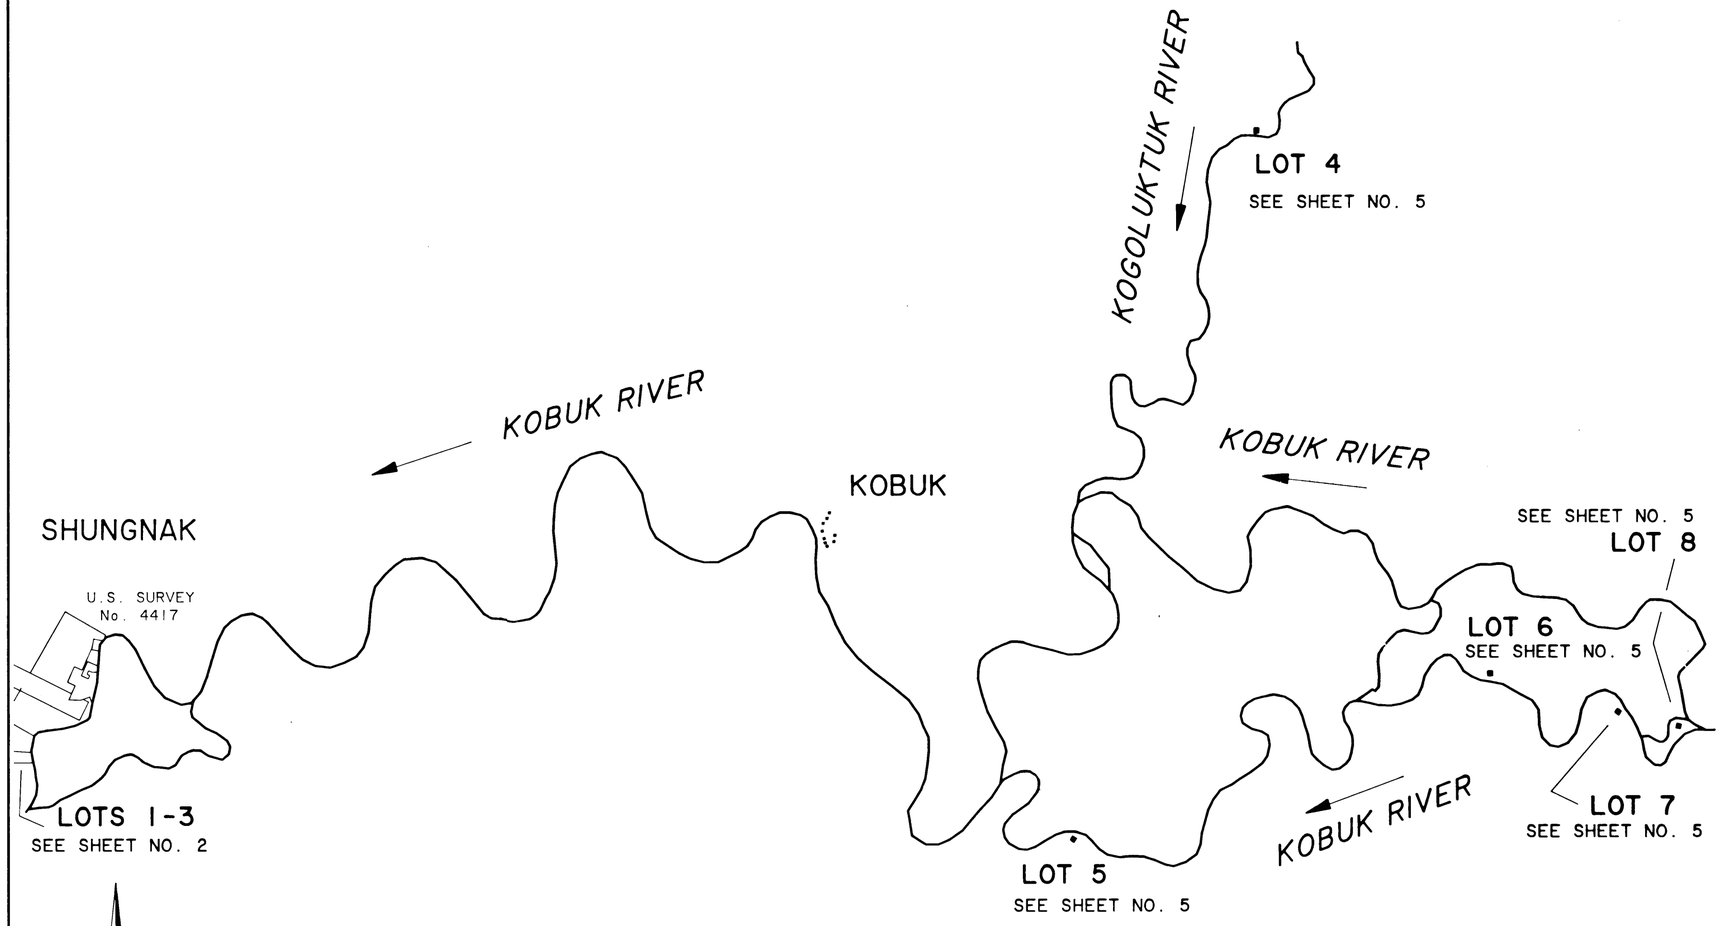



Mean Magnetic Declination 23 1/2° E.



Hydrography, for sheet 1, was determined from digitized U.S. Geological Survey quandrangle maps.

I, Daniel A. Wiesner, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on sheets 1 through 7 of this survey, in conformity with the Special Instructions dated August 14, 1990, the Manual of Instruction for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on these plats.

1-18-94
Date

Daniel A. Wiesner
Cadastral Surveyor

I hereby certify that lots 1 through 8 represented on sheets 1 through 7 of this survey are Interim Conveyed to Nana Regional Corporation, Inc. Interim Conveyance Nos. 904/905 issued by the United States of America; said lots also fulfill all entitlements under the provisions of ANCSA 14 (c) for the Nana Regional Corporation as requested by the Shungnak plan of survey, approved August 15, 1990.

6/23/94
Date

President, Nana Regional Corporation

DAW

ALASKA NATIVE CLAIMS SETTLEMENT ACT

(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8

(P.L. 92-203, 85 STAT. 688, 702, 703)

NANA REGIONAL CORPORATION, INC.

AT

SHUNGNAK, ALASKA

AND THE RETRACEMENT OF A PORTION OF U.S. SURVEY NOS. 5471, 4417 TRACT A, AND B.

This plat contains the entire survey record.

The exterior boundaries of Township 17 North, Ranges 8 and 9 East, Kateel River Meridian, the exterior boundaries and a portion of the subdivisional lines of Townships 17 and 18 North, Ranges 10 East, Kateel River Meridian, Alaska, were surveyed by Richard R. Bidasolo, Cadastral Surveyor, in 1977.

U.S. Survey No. 4417 was surveyed by Edward A. Taylor, Cadastral Surveyor, in 1967.

U.S. Survey No. 5391 was surveyed by Mason W. Thayer, Cadastral Surveyor, in 1976.

U.S. Survey No. 5471 was surveyed by Harold D. Corbin, Cadastral Surveyor, in 1976.

U.S. Survey No. 9871 was surveyed by Paul L. Moss, Cadastral Surveyor, in 1990.

U.S. Survey No. 9875 was surveyed by Michael O. Harmening, Cadastral Surveyor, in 1990.

This survey was executed by Daniel A. Wiesner, Cadastral Surveyor, August 15 through September 15, 1990. in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved August 15, 1990, the Shugnak 14(c) Map of Boundaries, approved August 15, 1991, and Assignment Instructions dated August 15, 1990.

Field assistants were:

Paul L. Moss, Land Surveyor
Michael O. Harmening, Land Surveyor
Mark D. Wahlfield, Student Trainee (LS)
Brian A. Homrich, Student Trainee (LS)
Brit L. Primm, Student Trainee (LS)
Douglas R. Haywood, Student Trainee (LS)

Area: 203.79 acres

The azimuth was obtained from a direct observation of the sun and refers to the true meridian.

The approximate geographic position of corner No. 1, Lot 1, a meander corner, is:

LATITUDE: 66° 52' 54" NORTH
LONGITUDE: 157° 09' 59" WEST
NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "SHUGNAK (D-2)," Alaska, 1955 edition, with minor revisions in 1967.

This survey situated in and around Shungnak, Alaska.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1-7, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

Jerry L. Pinkerton JULY 1, 1994
Date

Deputy State Director for Cadastral Survey, Alaska
Acting

MWB

Plat # 94-5/ July 19, 1994/ Kotzebue Recording District

Officially Filed DUPLICATE **ORIGINAL**

DATE_ _ _ _ _ _

ALASKA NATIVE CLAIMS SETTLEMENT ACT

(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8

(P.L. 92-203, 85 STAT. 688, 702, 703)

NANA REGIONAL CORPORATION, INC.

AT

SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

LEGEND

- ● ANCSA 14(C) primary monument (Iron post, 28 ins. long, 2 1/2 ins. diam. with brass cap).
- ○ ANCSA 14(C) secondary monument (Aluminum rod, 3/4 ins. diam., with aluminum cap).
- ■ Recovered monument

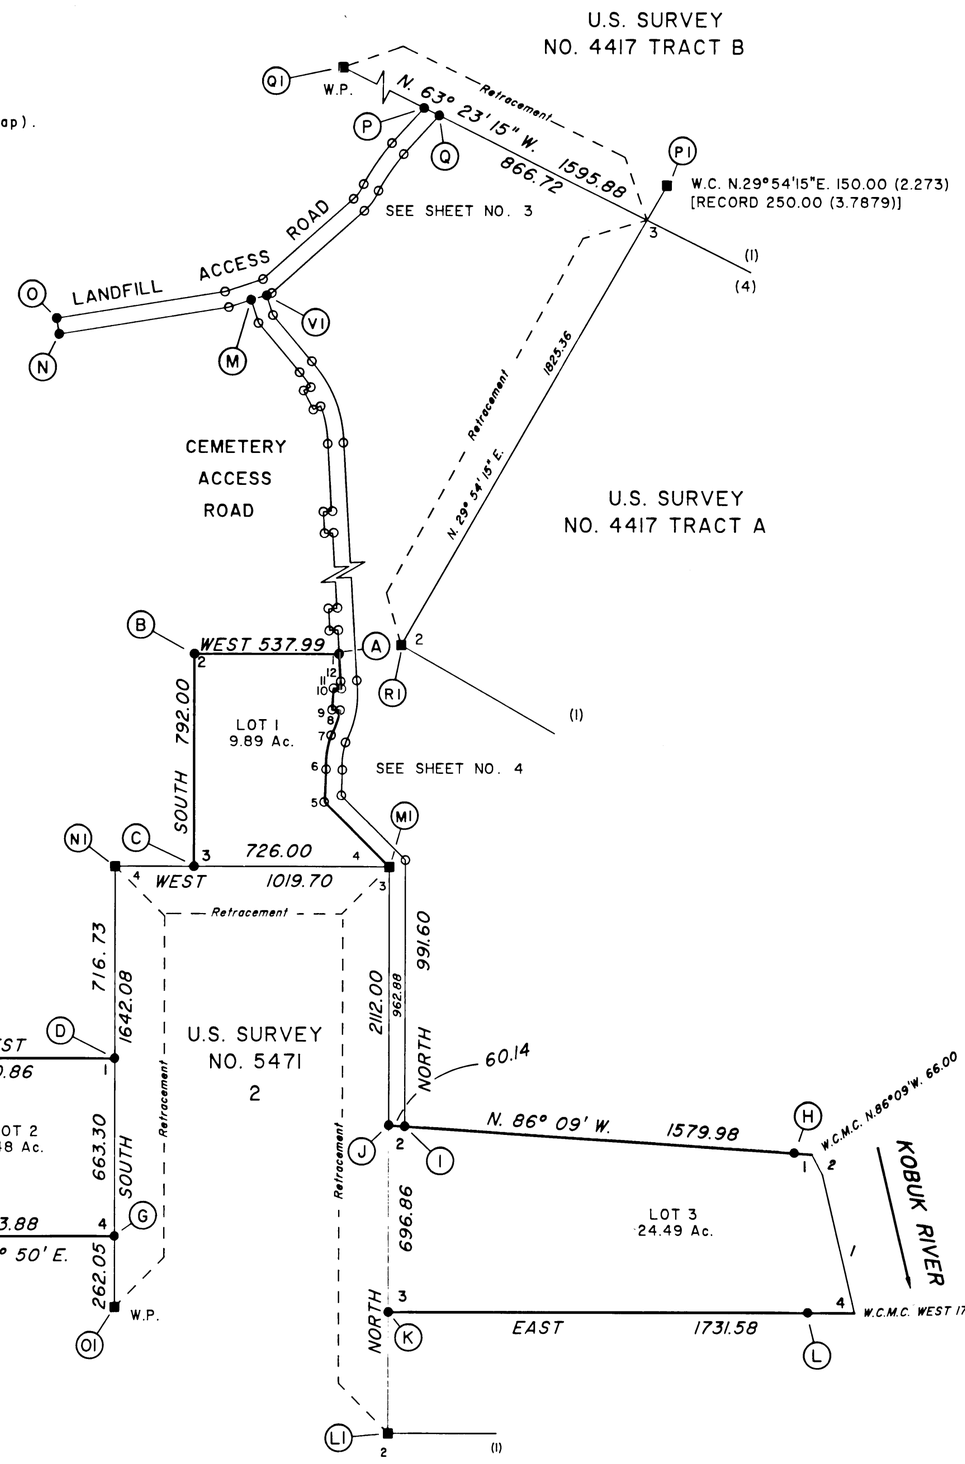

True Meridian

Mean Magnetic Declination

MEANDERS

Along a well-defined bank, at the the line of ordinary high water.

Lot 3

1. N. 12°35' W.; 527.62 ft.
2. N. 27°52' W.; 85.81 ft.

DAW

Plat #94-5 / July 19, 1994 / Kotzebue Recording District

Officially Filed DUPLICATE ORIGINAL

DATE_____

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8
(P.L. 92-203, 85 STAT. 688, 702, 703)
NANA REGIONAL CORPORATION, INC.
AT
SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

CURVE DATA

CURVE	RADIUS	LONG CHORD		DELTA
C - 1	457.06	N. 35°36' W.	68.10	8°33'
C - 2	517.06	N. 21°34' W.	324.71	36°36'
C - 3	457.06	N. 12°16' W.	143.10	18°01'

LEGEND

- ● ANCSA primary monument (Iron post, 28 ins. long, 2 1/2 ins. diam. with brass cap).
- ○ ANCSA secondary monument (Aluminum rod, 3/4 ins. diam., with aluminum cap).
- ■ Recovered monument

U.S. SURVEY
No. 4417 TRACT B

(See sheet 2)

(W.P.) N. 63° 23' 15" W. 62.36 (1)

S. 42° 26' W. 177.94
S. 33° 45' W. 194.94
S. 42° 26' W. 197.90
S. 33° 46' W. 179.80
S. 36° 38' W. 52.82
S. 36° 38' W. 76.87
S. 48° 12' W. 461.51
S. 48° 12' W. 449.07
S. 71° 37' W. 148.59
S. 71° 37' W. 18.04
N. 17° 28' W. 79.58
S. 80° 49' W. 635.69
S. 80° 49' W. 640.51
N. 9° 11' W. 60.00
S. 71° 37' W. 87.97
N. 17° 19' W. 90.67
60.00
165.84

LANDFILL ACCESS ROAD
60 FT. WIDE R.O.W.
2.32 Ac.

LANDFILL ACCESS ROAD

CEMETERY ACCESS ROAD
60 FT. WIDE R.O.W.
4.91 Ac.

N. 39° 52' W. 227.15
N. 39° 52' W. 238.97
C - 1
C - 2
C - 3
N. 3° 16' W. 251.70
S. 3° 16' E.
1022.74
N. 3° 16' W. 418.15

SEE DETAIL

(See sheet 4)

DETAIL

C - 1 L=68.16
N. 62° 58' E. 30.00
N. 27° 02' W. 80.00
C - 2 L=330.29
S. 62° 58' W. 30.00
C - 3 L=143.69

60 40 20 0 60 120 180 240
Feet

N. 86° 44' E. 30.00
N. 3° 16' W. 80.00
30.00
S. 86° 44' W.

150 0 150 300 450 600
Feet

True Meridian

Mean Magnetic Declination 23 1/2° E.

DAW

Plat #94-5/July 19, 1994/Kotzebue Recording District

Officially Filed DUPLICATE ORIGINAL

DATE_____

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8
(P.L. 92-203, 85 STAT. 688, 702, 703)
NANA REGIONAL CORPORATION, INC.
AT
SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

CURVE DATA

CURVE	RADIUS	LONG CHORD			DELTA
C - 4	443.29	N.	1°30'	W. 27.44	3°33'
C - 5	503.29	N.	8°02'	E. 197.13	22°35'
C - 6	443.29	N.	14°59'	E. 67.11	8°41'
C - 7	467.42	N.	10°45'	E. 139.42	17°09'
C - 8	527.42	N.	10°45'	E. 157.32	17°09'

LEGEND

- ● ANCSA 14(C) primary monument (Iron post, 28 ins. long, 2 1/2 ins. diam. with brass cap).
- ○ ANCSA 14(C) secondary monument (Aluminum rod, 3/4 ins. diam., with aluminum cap).
- ■ Recovered monument

Mean Magnetic Declination 23 1/2° E.

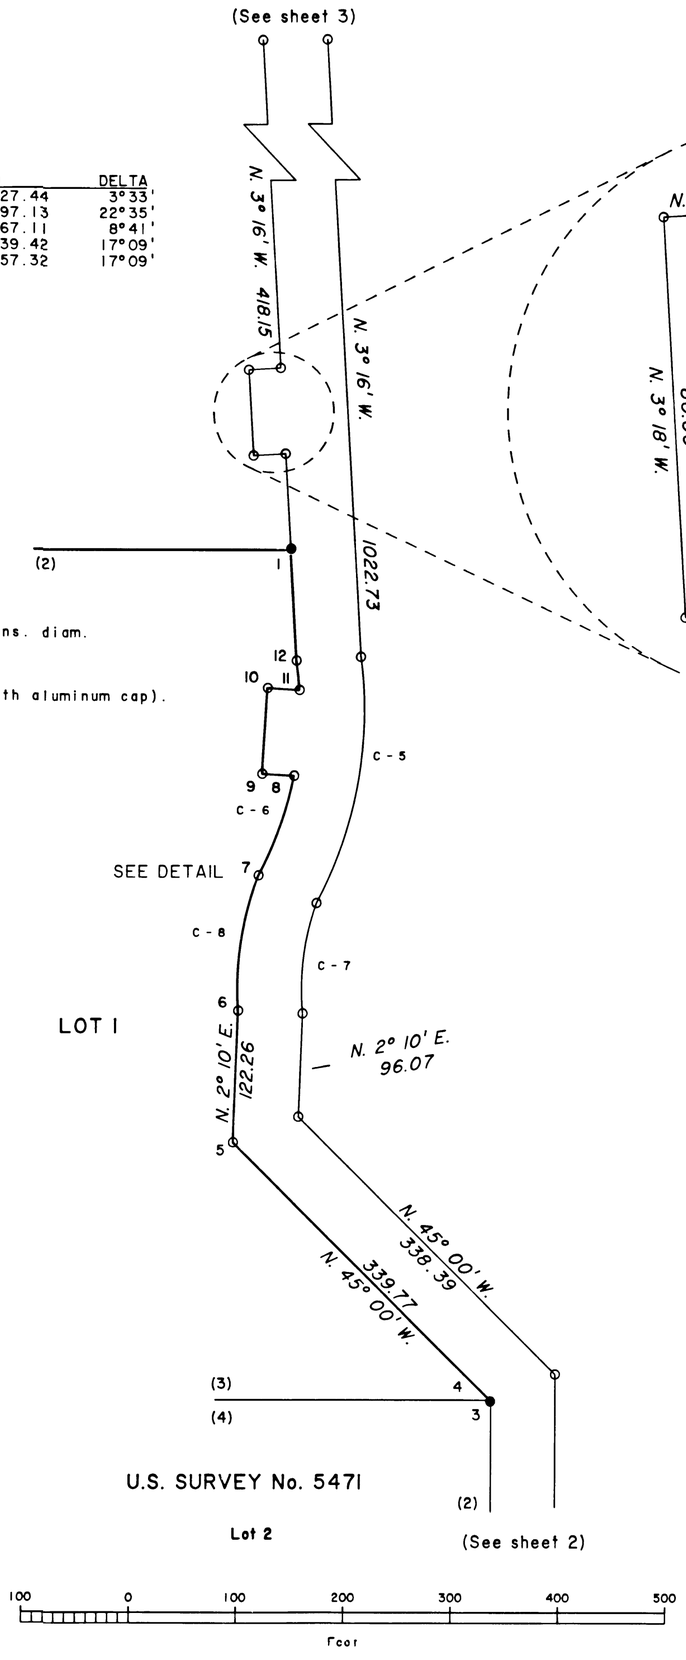

DETAIL

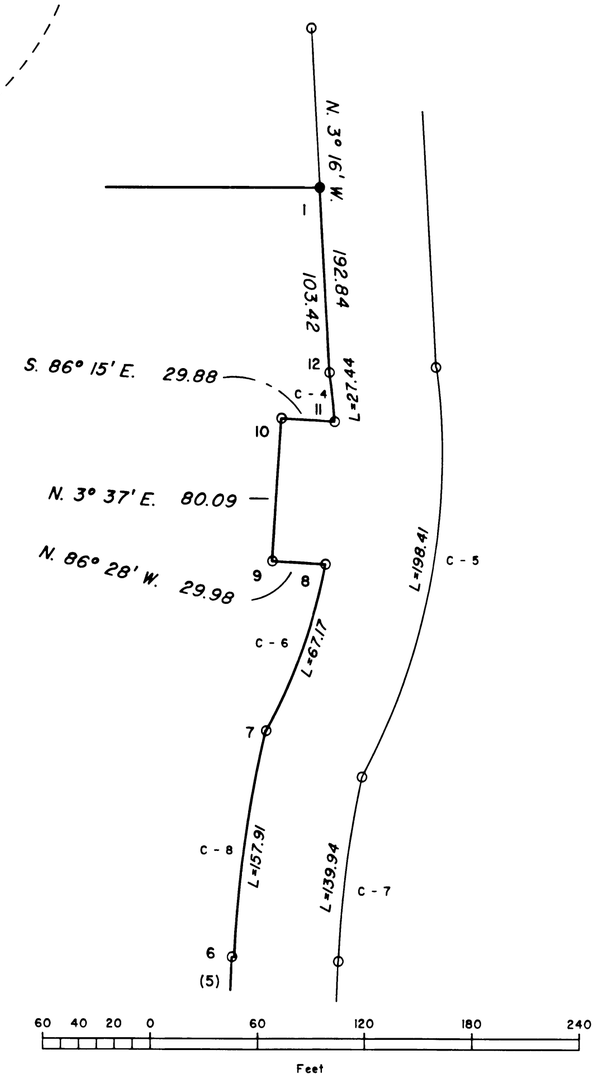

D/W

Officially Filed DUPLICATE ORIGINAL

DATE_____

Plat # 94-5 / July 19, 1994 / Kotzebue Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8
(P.L. 92-203, 85 STAT. 688, 702, 703)
NANA REGIONAL CORPORATION, INC.
AT
SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

LEGEND

- ● ANCSA 14(C) primary monument (Iron post, 28 ins. long, 2 1/2 ins. diam. with brass cap).
- ■ Recovered monument

GEOGRAPHIC POSITION OF THE WITNESS CORNER TO CORNER NO. 1, LOT 4, A MEANDER CORNER AS DETERMINED FROM A TIE TO U.S. SURVEY NO. 9875 IS: LAT. 66° 57' 41.68" NORTH LONG. 156° 44' 20.86" WEST

LOT 4
1.00 Ac.

N. 65° 53' E. 207.90
S. 24° 07' E. 209.22
N. 24° 11' W. 209.22
S. 65° 53' W. 207.66
MEANDER COURSE
KOGOLUKTUK RIVER
W.C.M.C. N.24°07'W. 108.00
W.C.M.C. N.24°11'W. 48.00
FROM W.C.M.C TO W.C.M.C. 2166.49
S. 32° 00' W.

W.C.M.C. No. 4, LOT 2
U.S. SURVEY No. 9875

APPROXIMATE GEOGRAPHIC POSITION OF THE WITNESS CORNER TO CORNER NO. 4, LOT 6, A MEANDER CORNER, AS DETERMINED FROM A TIE TO U.S. SURVEY NO. 9871, IS : LAT. 66° 53' 14" NORTH, LONG. 156° 37' 55" WEST

LOT 6
0.98 Ac.

S. 64° 28' W. 209.62
N. 26° 10' W. 207.63
S. 25° 47' E. 199.57
W.C.M.C. N.26°10'W. 22.44
W.C.M.C. N.25°47'W. 16.50
N. 66° 39' E. 211.22
MEANDER COURSE
KOBUK RIVER

APPROXIMATE GEOGRAPHIC POSITION OF THE WITNESS CORNER TO CORNER NO. 4, LOT 7, A MEANDER CORNER, AS DETERMINED FROM A TIE TO U.S. SURVEY NO. 9871, IS : LAT. 66° 53' 00" NORTH, LONG. 156° 36' 29" WEST

LOT 7
1.00 Ac.

S. 54° 21' W. 194.11
W.C.M.C. S.54°21'W. 16.50
N. 42° 38' W. 212.29
MEANDER COURSE
KOBUK RIVER
S. 36° 38' E. 214.50
N. 53° 22' E. 216.28
W.C.M.C. S.53°22'W. 16.50
FROM W.C.M.C TO W.C.M.C. 6401.71
S. 47° 44' E.

W.C.M.C. No. 1
U.S. SURVEY No. 5391

FROM W.C.M.C TO W.C.M.C. 714.72
N. 7° 09' E.

APPROXIMATE GEOGRAPHIC POSITION OF THE WITNESS CORNER TO CORNER NO. 1, LOT 5, A MEANDER CORNER, AS DETERMINED FROM A TIE TO U.S. SURVEY NO. 5391, IS: LAT: 66° 52' 04" NORTH, LONG: 156° 48' 11" WEST

LOT 5
1.00 Ac.

S. 33° 57' W. 203.00
N. 56° 03' W. 214.59
S. 56° 03' E. 214.59
N. 33° 57' E. 203.00
W.C.M.C. S.33°57'W. 50.00
W.C.M.C. S.33°57'W. 50.00
KOBUK RIVER
MEANDER COURSE

FROM W.C.M.C TO W.C.M.C. 3175.09
S. 24° 26' E.

W.C.M.C. 4
U.S. SURVEY No. 9871

FROM W.C.M.C TO W.C.M.C. 2627.53
S. 58° 17' W.

APPROXIMATE GEOGRAPHIC POSITION OF THE WITNESS CORNER TO CORNER NO. 4, LOT 8, A MEANDER CORNER, AS DETERMINED FROM A TIE TO U.S. SURVEY NO. 9871, IS : LAT. 66° 52' 45" NORTH, LONG. 156° 35' 01" WEST

LOT 8
1.00 Ac.

N. 14° 16' E. 195.48
S. 14° 36' W. 197.82
N. 75° 05' W. 220.55
S. 75° 42' E. 221.67
W.C.M.C. S.14°16'W. 50.00
W.C.M.C. S.14°36'W. 50.00
KOBUK RIVER
MEANDER COURSE

True Meridian

Mean Magnetic Declination 23 1/2° E.

100 0 100 200 300 400 500 600
FEET

DAW

Plat #94-5 / July 19, 1994 / Kotzebue Recording District

Officially Filed DUPLICATE ORIGINAL

DATE_____

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8
(P.L. 92-203, 85 STAT. 688, 702, 703)
NANA REGIONAL CORPORATION, INC.
AT
SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

A



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears S. 69° W., 135 1/2 lks. dist., mkd. X BT.

Dig pit, 18 x 18 x 12 ins., W. of post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

B

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., E. of post 6 ft. dist. and W. of post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

C



Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 3 ins. diam., bears S. 11° W., 54 lks. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 77° W., 80 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

D



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 8° E., 50 1/2 lks dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 86° W., 43 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

E

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins, in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears N. 27° E., 186 lks. dist., mkd. X BT.

A spruce, 10 ins. diam., bears S. 84° E., 228 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

F



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears N. 67° E., 163 lks. dist., mkd. X BT.

A spruce, 5 ins. diam., bears S. 38° W., 11 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

G



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins, in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 29° E., 32 lks. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 68° W., 78 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

H



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A birch, 5 ins. diam., bears S. 73° W., 22 lks. dist., mkd. X BT.

A birch, 6 ins. diam., bears N. 49° W., 20 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

I



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., N. and E. of post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

J



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 3 ins. diam., bears N. 66° E., 49 1/2 lks. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 4° W., 68 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

K



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 62° W., 140 lks. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 58° W., 194 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

L



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins, in the ground, with brass cap mkd. as shown, from which

A white spruce, 6 ins. diam., bears S. 89° E., 16 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

M



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 35 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 3 ins. diam., bears S. 2° W., 87 lks. dist., mkd. X BT.

A spruce, 3 ins. diam., bears S. 58° W., 62 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

N



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins, in the ground, with brass cap mkd. as shown, from which

A pink DEEP-1 magnet, bears S. 65° E., 5 lks. dist., 12 ins. in the ground.

A blue DEEP-1 magnet, bears S. 32° W., 5 lks. dist., 12 ins. in the ground.

Bury a clear DEEP-1 magnet at the base of the iron post.

O

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., on lines, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

P

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., on lines, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

Q



Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., on lines, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

R



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears N. 11° E., 13 lks. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 41° W., 41 1/2 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

S

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins, in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 71° E., 63 lks. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 24° W., 22 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

T



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears S. 69° E., 17 lks. dist., mkd. X BT.

A spruce, 5 ins. diam., bears S. 48° W., 92 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

U



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins, in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 32° E., 38 lks. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 65° W., 9 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

V



Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A cottonwood, 6 ins. diam., bears S. 33° W., 129 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

W



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A cottonwood, 8 ins. diam., bears N. 74° E., 19 lks. dist., mkd. X BT.

A cottonwood, 10 ins. diam., bears N. 1° W., 22 lks. dist., mkd. X BT on the bark.

Bury a clear DEEP-1 magnet at the base of the iron post.

X

Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A cottonwood, 6 ins. diam., bears N. 77° E., 96 1/2 lks. dist., mkd. X BT.

An alder, 4 ins. diam., bears N. 28° W., 67 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

Y



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A cottonwood, 7 ins. diam., bears S. 64° E., 85 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

Z



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins, in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears N. 24° E., 37 lks. dist., mkd. X BT.

A spruce, 5 ins. diam., bears S. 57° E., 19 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

DAW

Officially Filed DUPLICATE **ORIGINAL**

DATE_____

Plat #94-5 / July 19, 1994 / Kotzebue Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 8
(P.L. 92-203, 85 STAT. 688, 702, 703)
NANA REGIONAL CORPORATION, INC.
AT
SHUNGNAK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

(A1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A white spruce, 6 ins. diam., bears S. 24° E., 87 lks. dist., mkd. X BT.

A white spruce, 6 ins. diam., bears N. 74° W., 25 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(B1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A white spruce, 7 ins. diam., bears S. 22° W., 87 lks. dist., mkd. X BT.

A white spruce, 8 ins. diam., bears S. 76° W., 86 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(C1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A white spruce, 8 ins. diam., bears N. 17° E., 42 lks. dist., mkd. X BT.

A white spruce, 8 ins. diam., bears N. 41° W., 80 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(D1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a mound of stone, 3 ft. diam., to top of the brass cap mkd. as shown, from which

A stone mound 2 ft. diam., and 2 ft. high, on line, 4 lks. dist. from post.

Bury a clear DEEP-1 magnet at the base of the iron post.

(E1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins, in the ground, with brass cap mkd. as shown, from which

A cottonwood, 7 ins. diam., bears South, 126 lks. dist., mkd. X BT.

A cottonwood, 7 ins. diam., bears S. 61° W., 172 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(F1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A cottonwood, 6 ins. diam., bears S. 33 3/4° W., 116 lks. dist., mkd. X BT.

A cottonwood, 6 ins. diam., bears N. 38 1/2° W., 87 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(G1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins, in the ground, with brass cap mkd. as shown, from which

A cottonwood, 5 ins. diam., bears S. 86 1/2° W., 22 lks. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(H1)

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Mound of stone, 2 ft. diam., 1 1/2 ft. high, bears S. 15° W., 10 lks. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

(I1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A willow, 4 ins. diam., bears N. 17° E., 17 lks. dist., mkd. X BT.

A alder, 4 ins. diam., bears N. 50° W., 9 lks dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the iron post.

(J1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A willow, 3 ins. diam., bears N. 89° W., 8 lks. dist., mkd. X BT on the bark.

Bury a clear DEEP-1 magnet at the base of the iron post.

(K1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., both on line, 3 lks. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

(L1)

Found an aluminum post, 2 1/2 ins. diam., firmly set, projecting 6 ins., with aluminum cap mkd. as shown, from which the original bearing trees

A spruce, 6 ins. diam., bears S. 62° E., 81 lks. dist., with scribe marks C2 L2 S5471 BT visible on partially healed blaze.

A spruce, 8 ins. diam., bears S. 6° E., 73 lks. dist., with scribe marks C2 L2 S5471 BT visible on partially healed blaze.

A spruce, 10 ins. diam., bears S. 75° W., 112 lks. dist., with scribe marks C2 L2 S5471 BT visible on partially healed blaze.

(M1)



Found an aluminum post, 2 1/2 ins. diam., firmly set, projecting 6 ins., add marks to aluminum cap as shown, from which the original bearing trees

A spruce, 6 ins. diam., bears N. 24° E., 107 lks. dist., with scribe marks X BT visible on partially healed blaze.

A spruce, 5 ins. diam., bears S. 52° E., 71 lks. dist., with scribe marks X BT on open blaze.

A spruce, 12 ins. diam., bears S. 33° W., 265 lks. dist., with scribe marks BT visible on partially healed blaze.

(N1)



Found an aluminum post, 2 1/2 ins. diam., firmly set, projecting 6 ins., with aluminum cap mkd. as shown, from which the original bearing trees

A spruce, 4 ins. diam., bears N. 72° E., 58 lks. dist., with scribe marks X BT visible on partially healed blaze.

A spruce, 6 ins. diam., bears S. 20° W., 400 lks. dist., with scribe marks X BT visible on partially healed blaze.

A dead spruce, 3 ins. diam., bears N. 36° W., 262 lks. dist., with scribe marks X BT visible on partially healed blaze.

(O1)



Found an aluminum post, 2 1/2 ins. diam., firmly set, projecting 4 ins., with aluminum cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears S. 36° E., 110 lks. dist., with scribe marks WP L2 S5471 BT visible on partially healed blaze.

A spruce, 6 ins. diam., bears S. 56° W., 54 lks. dist., with scribe marks X BT on open blaze.

And a bearing tree of unknown origin

A spruce, 4 ins. diam., bears S. 54° W., 10 lks. dist., with scribe marks X BT on open blaze.

(P1)



Found an iron post, 2 1/2 ins. diam., firmly set projecting 5 ins., brass cap marked as shown.

(Q1)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins., brass cap mkd. as shown.

(R1)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins., brass cap mkd. as shown.

(S1)



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 in., with brass cap mkd. as shown, from which the original bearing trees

A spruce, 3 ins. diam., bears S. 14° W., 14 1/2 lks. dist., with scribe marks X BT on open blaze.

A spruce, 3 ins. diam., bears N. 78 1/4 W., 25 1/2 lks. dist., with scribe marks X BT on open blaze.

(T1)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins., with brass cap mkd. as shown, from which the original bearing trees

A birch, 5 ins. diam., bears N. 88° E., 17 lks. dist., with scribe marks X BT on open blaze.

A black spruce, 6 ins. diam., bears N. 44 1/2° W., 107 lks. dist., with scribe marks X BT on open blaze.

(U1)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins., with brass cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears S. 33 1/4° E., 18 lks. dist., with scribe marks X BT on open blaze.

A spruce, 9 ins. diam., bears S. 63 1/4° W., 37 lks. dist., with scribe marks X BT on open blaze.

(V1)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 x 18 x 12 ins., on lines, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

DAW